

Anti-Slip

R-test according to DIN 16165 (formerly DIN 51130)

R11: SE - KK64i (all thicknesses)

Sizes

Standard:

2000 x 1000 mm

2500 x 1250 mm

3000 x 1500 mm

4000 x 2000 mm

Fixed coil lengths (available at short notice):

widths of 1000, 1250 and 1500mm

length of up to 6000 mm

Notes

For protection in handling and processing the surfaces, we use ULFII PF584 - Fiber/Co2 film as standard on our fully automatic foiling machine. Other coating types can be found under downloads.

The representations of the surfaces do not necessarily correspond to the original sizes and serve only to give you an initial overview. Please request free original samples for project planning

Material

in stock:

1.4016 (stainless ferritic steel)

1.4301 (stainless austenitic steel)

1.4401/04 (stainless austenitic chrome-nickel-molybdenum steel)

AlMg 99.5 (Aluminium 1050 AW H14/H24)

on request:

1.4539


1.4509

1.4521

1.4571

Thicknesses

0.8 - 10 mm

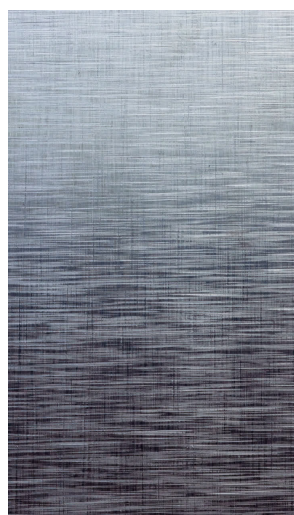

SE - KK - 64i