

Anti-slip

R-test according to DIN 16165 (formerly DIN 51130)

R10: SE - Nop IIIc (all thicknesses)

R12: SE - Nop K40 (all thicknesses)

Barefoot test according to DIN 51097

Class C: SE-Nop (all thicknesses)

Sizes

Standard:

2000 x 1000 mm

2500 x 1250 mm

3000 x 1500 mm

Dimple diameter: 12 mm Distance from center of dimple to center of dimple: 20 mm

Fixed coil lengths on request

Notes

For protection in handling and processing the surfaces, we use ULFI PF584 - Fiber/Co2 film as standard on our fully automatic foiling machine. Other coating types can be found under downloads.

The representations of the surfaces do not necessarily correspond to the original sizes and serve only to give you an initial overview. Please request free original samples for project planning.

Material

in stock:

1.4301 (stainless austenitic steel)

1.4401/04 (stainless austenitic chrome-nickel-molybdenum steel)

on request:

1.4571

1.4539

1.4509


1.4521

Thicknesses

Standard:

1.5 - 2.5 mm

Other thicknesses on request

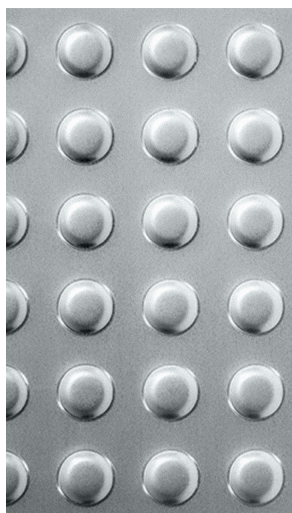

SE - NOP