

## Anti-slip

---

R-test according to DIN 16165 (formerly DIN 51130)

R10: SE - Tetra IIIC (all thicknesses)

## Sizes

---

Standard:

2000 x 1000 mm

2500 x 1250 mm

3000 x 1500 mm

Unembossed edge on the long and short sides. Dimensions by arrangement. Embossing depth 1.5 mm

## Notes

---

For protection in handling and processing the surfaces, we use ULFIL PF584 - Fiber/Co2 film as standard on our fully automatic foiling machine. Other coating types can be found under downloads.

The representations of the surfaces do not necessarily correspond to the original sizes and serve only to give you an initial overview. Please request free original samples for project planning.

## Material

---

in stock:

1.4301 (stainless austenitic steel)

1.4401/04 (stainless austenitic chrome-nickel-molybdenum steel)

on request:

1.4571

1.4539

1.4509

1.4521


## Thicknesses

---

Standard:

1.5 / 2.0 / 3.0 mm

Other thicknesses on request

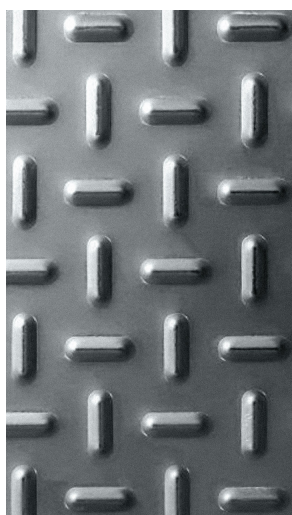

SE - TETRA